

# Fast Axis Collimator - FAC590



**General Description:** | **Advanced Optical Solutions** |

Acyindrical lens for the collimation of the fast axis of diode lasers.

product similar to image

© Photo: Markus-Steur.de

**Specification Data**

	Unit	Value
Material		S-TIH53 (Ohara)
Length (L)	mm	12.0 ± 0.05
Width (W)	mm	1.0 ± 0.05
Thickness (T)	mm	0.8 ± 0.01
Clear aperture	mm <sup>2</sup>	11.5 x 0.9
Surface quality @ 633 nm		λ/4 (typically)
Refractive index n @ 808 nm		1.823
Effective focal length (EFL) @ 808 nm	mm	0.59
Back focal length (BFL) @ 808 nm	mm	0.15
Numerical aperture (NA)		0.8
Transmission	%	> 99
Power within an angle of ± 1.1 mrad (*)	%	> 85


**Product Code**

**AR Coating**

ZLE001319	600 - 700 nm	
ZLE000115	790 - 990 nm	
ZLE001684	1000 - 1600 nm	
MOD000362	790 - 990 nm	<b>With bottom tab (gap 0.1mm)</b>

**On request**

- Customized coating
- Customized length
- Other dimensions or mounting blocks

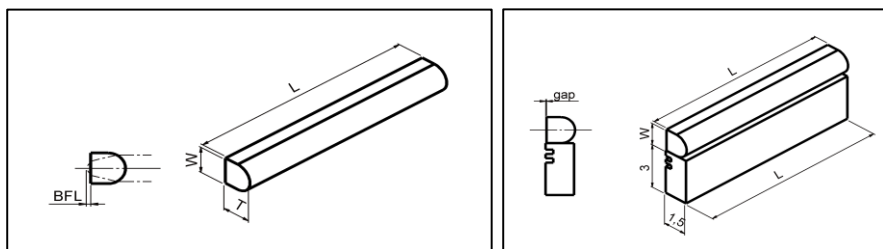

NOTE: Optical design is included in ZEMAX lens catalog.

**RoHS compliant**  
2002/95/EG

(\*) Valid for an emitter-height of 1µm and no smile of the laser diode

Copyright © 2011 LIMO GmbH. All rights reserved.  
All LIMO products are patent pending. Subject to change without notice.  
Version May 16, 2019